

## **Ankit Steels**

An ISO 9001: 2015 Certified Company



Manufacturers & Exporters Of Lubricating Tools, Automotive Tools & Hand Tools








Ankit Steels has become one of the most respectable, energetic and trusted Manufacturers & Exporters to the Global Markets for Engineering products like Automotive Tools, Lubricating Tools, Hand Tools, Forgings & CNC machined components. The company has state of the art Infrastructure which helps us to offer good quality products which gives Value for Money in its true sense. Highly experienced Technical and Management team have helped the company reach new heights.

## Infrastructure =

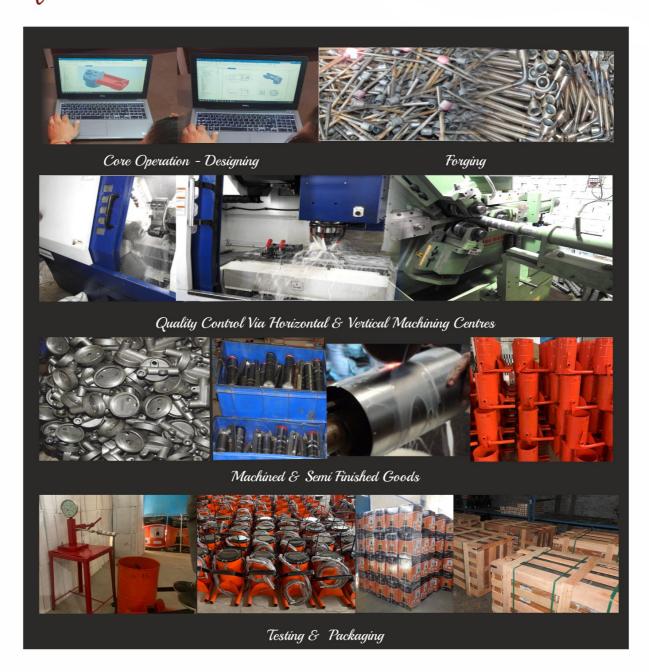



### LEVER GREASE GUN - ECONOMY MODEL

### Art. No. MAG01

- · Head designed from Sheet Metal.
- Grip on Lever handle for comfortable use.
- Knurled barrel for easy grip.
- Develops upto 6000 PSI Pressure.
- Suitable for use with 14 oz Cartridge.
- Available in 1/8 BSPT, 1/8 NPT, M10 threads.

Available with 6" Crank Tube or 12" Flex hose & 4 jaw coupler.



### LEVER GREASE GUN - MEDIUM DUTY

### Art. No. MAG02

- Available in Aluminum Die Cast or Cast Iron Head with built in air bleeder.
- Develops upto 6000 PSI Pressure.
- Suitable for use with 14 oz cartridge.
- Available in 1/8 BSPT, 1/8 NPT, M10 threads.







**Cast Iron Head** 



LEVER GREASE GUN - HEAVY DUTY

### Art. No. MAGO3

- · Aluminium head with air bleeder & bulk loader.
- Variable stroke feature built-in for usage in
- confined spaces. Available with 6" Crank Tube or 12" Flex hose &
- 4 jaw coupler.
- **Develops Upto** 10,000 PSI Pressure. Capacity: 500 gms bulk / 400 (14 oz
- cartidge).

   Available in 2 Finishes
  - 1. Powder Coated

**PISTOL GREASE GUN** 



2. Chrome Plated coated finish





10,000 PSI

Variable Stroke

### Art. No. MAG04

- Available with 4" crank tube or Flex hose & 4 jaw coupler.
- One Hand Operation grease gun. Aluminium die cast head with bulk loader. Ideal for grease fittings with limited access.

· Develops upto 5000PSI Pressure.

• Capacity: 500 gms bulk / 14 oz cartridge Available in 2 Finishes 1. Powder Coated 2. Chrome Plated



Single Piece complete **Aluminium Die Head** 



2 Sided Greasing for front & top discharge



Chrome **Plated Finish** for longer life Comfortable MAG04 B Grip easy grip Professional

**Grease Gun** 



### Art. No. MAG05

- Toolbox size Deluxe Mini Pistol Grease Gun.
- Aluminum cast head front & top discharge ports.
- Ideal for greasing in tight spaces such as
- CNC machines. **Develops Upto**
- 3,500 PSI Pressure. Capacity: 120 gms
- bulk / 85 gms grease cartridge. Available in 2 Finishes
- 1. Powder Coated
- 2. Chrome Plated



# **Ankit Steels**

### LEVER GREASE GUN - HIGH VOLUME

### Art. No. MAG06

- Aluminum Die Cast head.
- Larger piston diameter pushes out more grease per stroke reducing time to grease a joint.

  Heavy duty drop resistant steel barrel in premium
- metallic powder coating finish.
- Available with 6" crank tube and 4 jaw coupler.



### **DOUBLE PISTON GREASE GUN**

### Art. No. MAG08

- Comes with fixed or flexible spout or both.
- High Output Greasing solution.
- High Tolerance CNC Machined Aluminium Die Cast Head. Available in 500cc & 600 cc Capacity
- Available in 2 Finishes
  - 1. Powder Coated



### MINI LEVER GREASE GUN

### Art. No. MAG07

- Compact tool box size grease gun.
- Aluminum die cast head.



Art. No.	Bulk Load Capacity (CC)
MAG07 A	200 cc
MAG07 B	300 cc

### 900 CC GREASE GUN - HIGH CAPACITY

### Art. No. MAG09

- Aluminium die cast grease gun head with built-in air release valve.
- Soft rubber grip on lever handle for comfortable operation
- Develops upto 6000 PSI Pressure.
- Time & Cost saving where volume & frequency of Greasing is high.
- Available in 2 finishes:
- 1. Powder coated
- 2. Chrome Plated.



# **Ankit Steels**

### 16Oz / 450 CC GREASE GUN

### Art. No. MAG10

- Used with 16 Oz grease Cartridge.
- Suitable for use in general lubrication & daily maintenance work .
- Aluminium die cast grease gun head with built-in air release valve.
- Soft rubber grip on lever handle for comfortable operation.



### **PUSH TYPE GREASE GUNS**

### Art. No. MAG12

- · Push type grease gun for use with bulk grease only.
- Compact toolbox size, ideal for greasing Impact Wrenches, Lawn Movers, Chain Saws, Trailers ATV's, Autos & Trucks, etc.
- · Develops upto 1000 PSI pressure.
- Comes complete with universal connector.



Made of Plastic available in 4 oz & 8 oz







Push with palm of hand

### AIR OPERATED GREASE GUN- CONTINUOUS

### Art. No. MAG11

- Continuous flow of grease with press of the trigger.
- Air Inlet Pressure: 60 120 PSI (4-8 BAR).
- For use in factory maintenance, Fleet, Trucks etc.
- Develops Upto 4,800 PSI pressure.
- Capacity: 500 gms bulk / 400 gms cartidge.



### **SUCTION GUN**

### Art. No. MAG13

- · Rugged transfer gun designed for use with gear oil to get them both in and out of gear box.
- Needs no priming.
  Supplied with 12" Flexible vinyl hose.
- Capacity 16 oz.



### SILICON GUN / CAULKING GUN

### Art. No. MAG14

- Carbon steel construction.
- Quick release thumb press.
- Used to easily apply Silicon Sealent for Sealing/ Bonding, Gasketing & Insulation in various industries.



MAG14 B Half Round Model

## **OILING** EQUIPMENT & ACCESSORIES \_\_\_



### **ROTARY BARREL PUMP**

### Art. No. MAG15

- Solid cast iron construction.
- 1" pump inlet.
- Suitable for 50-210 litres drums.
- · Useful for transferring oil, diesel, kerosene & other non-corrosive



### Art. No. MAG15 A

- Chemical resistent and effortless operation pump.
- Comes complete with 1" discharge spout and 2" NPT Polythene Adopter.
- · Suitable for trouble free dispensing of petroleum products, water & water based Chemical, many acid and alkali solutions.



- suction tube & 2" bung adaptor for use on drums of capacity 50 to 205 Litres.
- · Do not use with water based media, acids, chemicals, Solvents, etc.



### LEVER ACTION BARREL PUMP

### Art. No. MAG16

- Zinc Die cast pump head with steel body.
- 3/4" pump inlet.
- · Includes telescopic suction tube.
- Suitable for 50-210 litre drums.
- · Used for transferring oil based fluids, kerosene & diesel.



### TRANSFER GUN

### Art. No. MAG17

- Supplied with 8 feet vinyl hose for suction and discharge.
- Suitable for use of fuel oil, Antifreeze, brake fluids, petrol & cooling liquids.
- · Pump has dual operation. It draws in and pump out in a single operation.
- · Capacity 16 oz.



### **OIL CANS**

### Art. No. MAG18

- · Pump mechanism is fitted with 2 steel balls for large volume delivery each stroke.
- · Available with rigid or flexible spout or both.





### MAG18 A - HIGH PRESSURE METAL OILER

Oil can body is drawn from tin coated sheet and has powder coated finish.

MAG18 B - PLASTIC BODY OILER

Plastic Oil cans are designed with dome shaped body.

### **GREASE GUN HOSES**

- For greasing, fittings with difficult access.
- Thermoplastic Construction, fully Flexible hose.
- Working pressure Upto 3,500 PSI & Bursting pressure of 10,000 PSI.
- Zinc plated steel end connections threaded as per customer requirement.



Art. No.	Length (end to end)
MAG19/8	200mm (8")
MAG19/12	300mm (12")
MAG19/18	450mm (18")
MAG19/20	500mm (20")

### **GREASE GUN STEEL EXTENSIONS**

#### Art. No. MAG20

- · Steel construction with bright zinc plated finish
- High strength rolled threads on both ends.
- Working pressure Upto 6,000 PSI & Bursting pressure of 12,000 PSI



Art. No.	Length (end to end)	Туре
MAG 20/4	100mm (4")	Straight
MAG 20/6	150mm (6")	Bent

### HYDRAULIC COUPLERS

- Fully Hardened Spring Steel Jaws.
- Hexagonal Nut for Easy Tightening.
- Recommended for use with All Type of Grease Guns.





### **BUTTON HEAD COUPLERS**

### Art. No. MAG21 A

- · For Greasing of Button Head Grease Fittings.
- · Zinc Die cast body.
- · Mostly used on Heavy Machinery, Agricultural & Contractor's Equipment.
- 3 Types: Push-On, Hook-On & Swivelling.





Hook On

Push On

### **GREASE FITTINGS**

- Heat Treated Greasing Ends.
- Zinc plated to make them Rust Proof
- Threads size:
- (I) 1/4" UNF (II) 1/8" NPT
- (III) 1/8" BSP
- (IV) 6x1MM Taper 8x1 MM - Taper
- (VI) 10x1 MM Taper







Angled - 45° Angled - 90°

### **GREASE GUN ACCESSORIES**











### **BUCKET PUMP**

### Art. No. MAG24

- High Volume High Pressure Bucket Grease Pump.
- For use with Agricultural, Earth Moving & Automotive Equipment, Especially useful in applications Requiring Frequent Greasing.
- For use with NLGI 1,2 & 3 greases.
- Develop Upto 5000 PSI Pressure.



(With Wheels)

Swivel Connector, Allows easy Manoeuvrability of Hose without Hose kinking



Air Release valve for Easily Removing Trapped Air from Grease

Maximum Grease Level Marked on the Grease Bucket

Bucket

High Pressure Hose : 2.2m x <sup>1</sup>/4" ID

Steel Bucket with Foot Rest

(Without Wheels)


Art. No. Without Trolly	Art. No. With Trolly	Capacity (Kgs)
MAG24/3		3 Kgs
MAG24/5	MAG24/5T	5 Kgs
MAG24/6	MAG24/6 T	6 Kgs
MAG24/10	MAG24/10T	10 Kgs
	MAG24/15T	15 Kgs
(F)	MAG24/20T	20 Kgs

### PNEUMATIC GREASE BUCKET

### Art. No. MAG25

- World-class industrial High Pressure Grease Pumps with Guaranteed Performance & Hassle Free Operation.
- Pump Dispenses Grease at Pressures upto 50 times the Air inlet Pressure.
- Designed to work in Tough Conditions these are ideal for use in industry, Workshop,
   Farm, Construction or as Part of the Mobile Grease System.
- All Metal Construction, Fully CNC Machined with Hardened Wear Resistant Moving Parts.
- Reciprocating Piston Operated 63 mm Dia. Air Motor Fitted with Strainer at Suction Tube inlet for Clean Grease to The Bearing.
- Supplied Complete with Drum Cover, Rubber lined follower Plate, 2.2m of High Pressure Grease Hose, Z-Swivel & Professional Grease Control Valve.
- Portable Version Available with Built-in Steel Drum, Complete with Wheels & Pull Handle.
- Recommended for use with Light and self Collapsing Grease upto NLGI 2 Wetted Components.
- Steel, Brass, Aluminium, Polyurethane & Nitrile Rubber Recommended.

### USE Light & self collapsing grease upto NLGI 2





Art. No.	Capacity (Kgs)	Box Qty
MAG25/10	10 Kgs	1
MAG25/25	25 Kgs	1
MAG25/50	50 Kgs	1

# Ankit Steels An ISO 9001: 2015 Certified Company

**Comfortable Carry Handle** 

**Rubber Foot Mounts Ensures the Pump** 

remains firm while pumping grease.

### **FOOT OPERATED GREASE PUMP**

### Art. No. MAG26

- No more tired arms or hands after greasing.
- All moving parts submerged and lubricated by the grease, lasts a lifetime Moving parts create wave action in grease, thus no messy follower plate required and auto removal of air pockets.
- · No trouble some seals to replace.
- Clip-on lid keeps rain and dust out.
- · Carry handle hinges away for easy filling.







### PEDAL ACTION GREASE PUMP WITH WHEELS

Art. No. MAG26W



### **GREASE FILLER PUMP**

### Art. No. MAG28

- Aluminum cast head fitted with zinc plated suction tube and Aluminium casted flange.
- An ideal grease pump for bulk filling of grease gun.
- Bend spout fitted with loader to fit the filler nipple.



### **BUCKET OIL PUMP**

### Art. No. MAG27

- Portable Oil Pumps Designed for Dispensing Transmission Differentials & Heavier Oils.
- Pump with Variable Handle Setting for use with Media of
- Different viscosities.
- Includes 48" / 4' PVC Hose with Nozzle.
   Includes Steel Drum (12 litre or 16 litre capacity) with a choice of with or without Wheels.



Art. No.	Capacity (Kgs)	Qty
MAG27/12	12 L without wheels	1
MAG27/12W	12 L with Wheels	1
MAG27/16	16 L without wheels	1
MAG27/16W	16 L with wheels	1

### **Automotive** TOOLS



### **PLASTIC MEASURES**

### Art. No. MAG30

- Translucent
   Polethylene
   construction
   with marking
   in litres on one
   side.
- Complete with flexible spout and cap & lid for the container.
- Available in 1, 2, 3 & 5
   litres capacity.





HEAVY DUTY MEASURES Capacity: 1.5 Litre 5 Litre

### **PLASTIC FUNNELS**

### Art. No. MAG31

- Anti-splash & spillproof Funnels.
- 2" Bung on FNL/9B allows it to be used directly on dums.
- Available in 1.7 & 3 litres capacity.





HDPE STANDARD FUNNELS

Funnel size: 4",6",7",10"

### тоw ноок

### Art. No. MAG32

- Made from Special Alloy Steel
- Drop Forged
- CNC Machined



### **FLANGE NUT**

### Art. No. MAG33





- Drop Forged
- CNC Machined
- Other Size Available as Per Requirement

Sizes	
40 x1.50mm	
28 x1.50mm	

### **HYDRAULIC JACK**

### Art. No. MAG34

- Rugged Construction.
- 100% Factory Tested.
- Machined & Polished Ram with die cut threads to reduce wear & tear.

Art. No.	Sizes
MAG 33/3	3T
MAG 33/5	5T
MAG 33/10	10T
MAG 33/15	15T
MAG 33/25	25T
MAG 33/35	35T
MAG 33/50	50T
MAG 33/75	75T
MAG 33/100	100T



### **TOOL BOX**

### Art. No. MAG35



- General Purpose Tool Box.
- Manufactured from Heavy guage Steel Sheet.
- Full spread cantilever.

	Description
5	Compartment
5 Compa	artment - Extra Long
3	Compartment
1	Compartment

### L-HANDLE

### Art. No. MAG36

Sizes	Dia (mm)	Length(in)	
1/2"	16	10	
1/2"	16	12, 16	
3/4"	22	12	
3/4"	22	15, 18	



### T - SPANNER

Art. No. MAG37



Socket Size	
6mm	
7mm	
8mm	
9mm	
10mm	
11mm	
12mm	
13mm	
14mm	

## **Automotive** TOOLS



### **CROSS WHEEL WRENCH**

### Art. No. MAG38

- Manufactured from Special Selected Steel.
- Full or socket induction Hardened.
- Nickel Chrome, zinc plated or powder coated finish.
- Sockets available in METRIC, SAE or UNIVERSAL sizes.



Art. No.	Description
MAG37 A	Standard wrench
MAG37 B	Reinforced wrench
MAG37 C	Folding type wrench

### **Heavy-Duty Truck Lug Wrenches**

Use on heavy-duty trucks, buses, and tractors. Drop-forged or welded center provides strength and durability. Some wrenches have center hole for a leverage bar. Socket sizes provided fit most metric or SAE lug nuts on today's trucks. Stock: 1" (25 mm).







Socket Sizes	Length	Weight
1-1/16", 1-1/4", 1-1/2",	27-1/2"	13.8lbs
13/16" square	(70 cm)	(6.1 kg)
24, 27, 30, 33 mm	27-1/2"	13.5 lbs
	(70 cm)	(6.1 kg)
1-1/2", 13/16"square,	27-1/2"	14.2 lbs
30, 33 mm	(70 cm)	(6.4 kg)
1-1/4", 1-1/2", 13/16"	27-1/2"	13.5 lbs
square, 3/4" service arm	(70 cm)	(6.1 kg)
1-1/16", 1-1/4", 1-1/2",	27-1/2"	13.5 lbs
13/16" square	(70 cm)	(6.1 kg)

### **L SPANNER**

### Art. No. MAG40

- Manufactured from Special Selected Steel.
- · Full or socket induction Hardened.
- · Nickel Chrome, zinc plated or powder coated finish.
- Sockets available in METRIC, SAE or UNIVERSAL sizes.



Specification		
Туре	Round end, Chisel end	
Rod Ø (mm)	14, 15, 16	
Length (mm)	350, 375, 400	

### WHEEL NUT WRENCH

### Art. No. MAG39

- · Manufactured from
  - Special Selected Steel.
- · Full or socket induction Hardened.
- Nickel Chrome, zinc plated or powder coated finish.



### **Double End Truck Wrenches - HEAVY DUTY**

Use on trucks, buses, farm, and off-road vehicles. Great for on-theroad service. Sizes available for all SAE and metric lug nuts. All wrenches are forged from 1" alloy steel for long lasting strength. Length: 16" (41 cm). Use truck wrench handle.





### SAE

Socket Sizes	Weight
1-1/8" with 13/16" square x 1-1/2"	4.6 lbs (2 kg)
1" with 5/8" square x 1-1/4"	4.3 lbs (1.9 kg)
7/8" x 1-1/16"	4.5 (2 kg)
1-1/16" x 1-1/8"	4.5 lbs (2 kg)
1-3/16" x 1-3/16" (1-3/4" Stud Depth)	4.6 lbs (2 kg)
1-1/2" x 13/16 " square	4.5 lbs (2 kg)
1-1/4" x 1-1/16"	4.4 lbs (2 kg)
1" with 5/8" square x 1-3/16"	4.5 lbs (2 kg)

1" with 5/8" square x 1-3/16"	4.5 lbs (2 kg)
Metric	
Socket Sizes	Weight
17 mm square x 35 mm	4.5 lbs (2 kg)
24 mm x 33 mm	4.4 lbs (2 kg)
27 mm x 30 mm (1-3/4" Stud Depth)	4.6 lbs (2 kg)
21 mm square x 41 mm	4.5 lbs (2 kg)
30 mm x 33 mm (1-3/4" Stud Depth)	4.6 lbs (2 kg)
33 mm with 21 mm square x 41 mm	4.5 lbs (2 kg)
SAE/Metric	
Socket Sizes	Weight
33 mm with 13/16" square x 1-1/2"	4.5 lbs (2 kg)

### Truck Wrench Handle Art. No. MAG41

Heat-treated for strength and durability. Fits all Double-end truck wrenches.





### **TYRE LEVER**

### Art. No. MAG42

 Manufactured from Special Selected Steel.

Speci	ification
Length (Inch)	12, 16, 20, 24, 30
Width (Inch)	3/4, 1

## **New** DEVELOPMENT



### BATTERY OPERATED GREASE GUN - (MADE IN INDIA)

### Art. No. MAG44

 $MAG\ Power\ Grease\ Gun\ is\ a \ lithium-ion\ Battery\ Operated\ Grease\ Gun\ .\ Gun\ is\ Developed\ for\ manual\ Lubrication\ of\ Grease\ Points\ and\ includes\ LED\ and\ Digital\ Control\ Card.$ 

### IT OPERATES AT 2 DIFFERENT SPEEDS AND THE DIGITAL CARD INCLUDES:

- Motor Protection Preventing Overload due to excessive Current Draw.
   Display will Flash RED when it occurs.
- Screen Showing Battery Charge, Pump Speed and Grease Output.
- LED Light to Help locate Grease Fittings in Dim Light.

TECHNICAL DETAILS FOR THE BATTERY GREASE GUN		
Operating Power	18 to 21 V DC	
Maximum Operating Pressure	6000 PSI	
Grease Reservoir Capacity	14 OZ	
Maximum Peak Pressure	10000 PSI	

ACCESSORIES		
Battery	Li Ion Battery	
Output	18V DC	
Capacity	3 Ah	
Pressure Rating	10000 psi	
Length of hose	1000 mm	



GREAS	SE OUTPUT
Low Output	100 g/ min
High Output	160 g/ min

### **QUICK RELEASE GREASE COUPLER**

### Art. No. MAG43


- MAG Quick Release Grease Coupler is designed for Quick & Convenient
   Disengagement of Coupler from Grease / Zerk Fittings under pressure.
- Grease Coupler can be used with all types of Grease Guns and Pumps
  Jaws are designed to fit all Types of Head profiles & Work with Both
  SAE & Metric Fittings.
- Coupler Jaws are Built from Heat Treated Spring Steel for Increased Wear Resistance.
- 4 Jaw Construction helps in Better Alignment.
- The Coupler Body is also Heat Treated to withstand High Pressures.











High Strength Springs
Provide Better Locking Force

### ANGULAR SOCKET WRENCH

### Art. No. MAG45

- 6X6 Point with Hole.
- Manufactured from Chrome Vanadium Seat (31CrV3).
- Fully Hardened to HRC 40-44.
- Elbow Milled Angle Wrench.
- Fully Polished Ni Cr Plated Finish & Head Polished Matt Chrome Plated Finish.



Specification	
Socket Sizes (mm)	6 to 36

### SOLID TUBULAR BOX WRENCHES

### Art. No. MAG46

- · Heavy Duty Pattern.
- Hot Forged.
- Profiled for Hexagon Shank.
- Manufactured from Chrome Vanadium Steel (31CrV3).
- Full Hardened, Head Polished & Ni Cr Plated.



Specific	ation
Socket Sizes (mm)	6x7 to 34x36
Tammu Baus	l awarth

# Tommy Bars Length 6-19 7.5mmx165mm 20-32 11.8mmx210 mm

### **TOWING EQUIPMENTS**

Art. No. MAG47






2"



- A: BALL DIAMETER
  B: SHANK LENGTH
- C: SHANK DIAMETER
- D: RISE

Ball Diameter	Shank Length	Shank Diameter
1-7/8"	1-5/8" to 3"	3/4" to 1"
2"	1-3/4" to 3"	3/4" to 1-1/4"
2-5/16"	2-1/8" to 3-1/2"	1" to 2"

3-1/4"

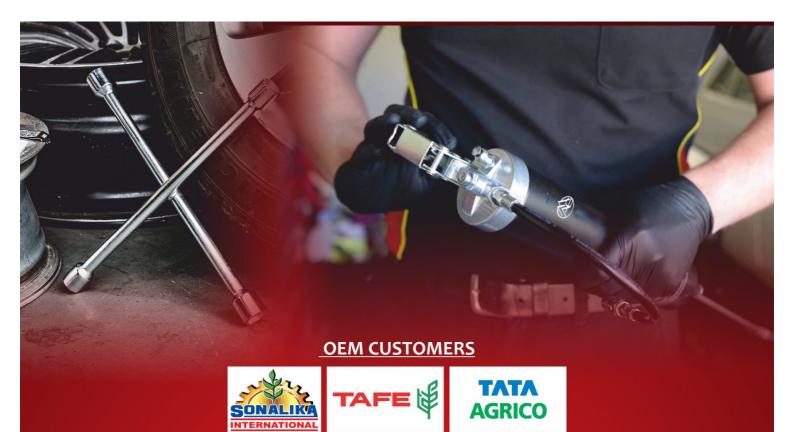



300+ CUSTOMERS IN 30+ COUNTRIES INCLUDING INDIA.

## **Ankit Steels**

An ISO 9001: 2015 Certified Company

India Address: B-25, Focal Point, Near Metro Tyres, Ludhiana(141010)

**Phone**: +91-161-4381907, **Mobile**: +91-94171-85873, +91-94171-97734

E- mail: ankitsteelsldh@yahoo.in, info@ankitsteel.in, ramasteelforge@yahoo.co.in

United Kingdom Address: Milton House, 240A Broadway, Bexleyheath, Kent, DA6 8AS.

Phone: +44 (0)2037955041, E-mail: ukmarketing@ankitsteel.in

Website: - www.ankitsteel.in, www.ramasteelforge.com