


Main Features

- Suitable for use on flats bed CNC lathes.
- Electromechanical uni-directional operation.
- 3 Piece face gear allows turret to be indexed without lifting.
- Clamping through disc springs ensures consistent rigid clamping.
- Option of internal coolant allows use of BWS drills.

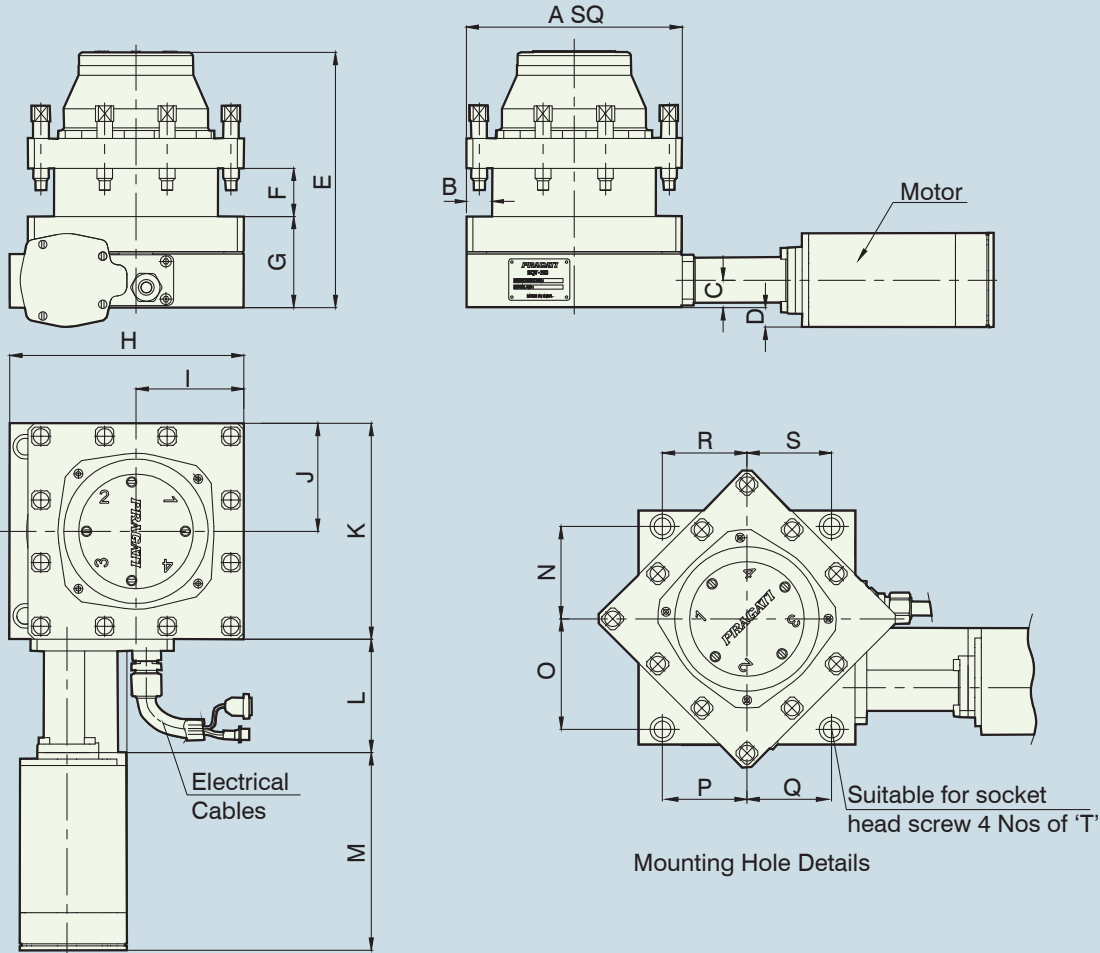

Series	Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	S	T	Wt.Kg
130	134-51	134	15	15.5	20.5	160	29	51	138	67	67	134	83.5	147.5	58	62	47	43	48	M8	14
	136-57	136	16	21.5	14.5	166	31	57	148	68	68	136	83.5	147.5	57	69	51	57	57	M10	15
160	166-70	166	20	21	23.5	196	40	70	180	83	83	166	87	149	71	85	65	65	65	M12	25
	166-81	166	25	21	23.5	202	37	81	192	83	83	177	87	149	71	97	71	81	81	M12	26
	163-70	163	22	21	23.5	198	40	70	175	81.5	81.5	177	87	149	65.5	80.5	61.5	64.5	64.5	M12	24
190	190-87	190	24	30.5	14	219	33	87	197	95	95	190	86	149	81	87	76	76	76	M12	33
200	200-110	200	25	30.5	14	234	40	110	200	100	100	200	86	149	88.5	88.5	65	65	75	M12	44
	200-120	200	32	30.5	14	255	50	120	200	100	100	200	86	149	88.5	88.5	65	65	75	M12	47