


GUK NYLON INSERT LOCKNUTS

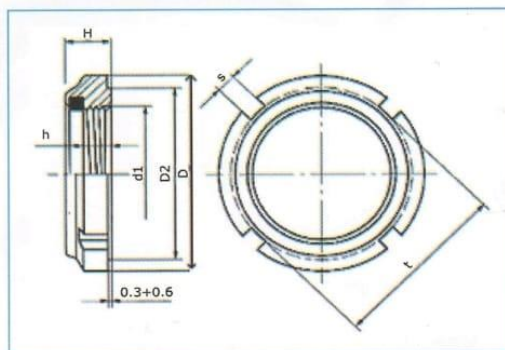

GUK SERIES LOCKNUTS

GUK Lock Nut, Round self-locking nuts with nylon insert, prevailing torque. made of steel.

Self-Locking Nuts manufactured with Polyamide Insert with Zinc Plated, Passivated Finish & metric ISO Fine Thread as standard. These Lock Nuts eliminates milling of the shaft and the use of a Lock Washers. Reduces assemble time and allows a greater degree of adjustment.

The bore of the threadless polyamide insert is a little smaller than the nuts inner diameter which increases friction between the nut and shaft. Hence it is secured against unscrewing even with high vibrations. NOT recommended for use above 100°C

Surface treatment: Zinc Plated

Material: Steel

Size: GUK0-GUK20 (M10-M100)

Spec	Size d1	H	h	D	D2	t	S	No. of slots
GUK00	M10x0.75	7.6	4.5	18	15	15	3	4
GUK01	M12x1.0	7.6	4.5	21	18	18	3	4
GUK02	M15x1.0	8.6	5.5	24	21	21	4	4
GUK03	M17x1.0	8.7	5.5	28	24	24	4	4
GUK04	M20x1.0	9.6	6.0	32	27	27	4	4
GUK05	M25x1.5	10.5	6.5	38	33	33	5	4
GUK06	M30x1.5	10.7	6.6	44	38	38	5	4
GUK07	M35x1.5	11.3	7.0	50	44	44	5	4
GUK08	M40x1.5	12.3	7.7	56	50	50	6	4
GUK09	M45x1.5	12.3	7.8	62	55	55	6	4
GUK10	M50x1.5	12.9	8.1	68	61	61	6	4
GUK11	M55x2.0	13.4	8.2	75	68	68	7	6
GUK12	M60x2.0	13.4	8.2	80	73	73	7	6
GUK13	M65x2.0	14.5	9.0	85	77	77	7	6
GUK14	M70x2.0	14.5	9.2	92	84	84	8	6
GUK15	M75x2.0	15.5	10.0	98	89	89	8	6
GUK16	M80x2.0	16.5	11.2	105	96	96	10	8
GUK17	M85x2.0	17.5	12.1	110	100	100	10	8
GUK18	M90x2.0	17.7	12.5	120	110	110	10	8
GUK19	M95x2.0	18.7	13.5	125	115	115	10	8
GUK20	M100x2.0	19.7	14.5	130	120	120	10	8